



ACRYLIC COVER & REAR MOUNTING METERS




FEATURES

Base is ABS & cover of Acrylic
 Suitable for panel mounting & rear mounting
 Available both in AC & DC
 Accuracy class 1.5%
 Double scale, center zero, suppressor
 special sensitivities on request


Models AC SR80, SR100
 DC MR60, MR80, MR100



MR 60



MR 80

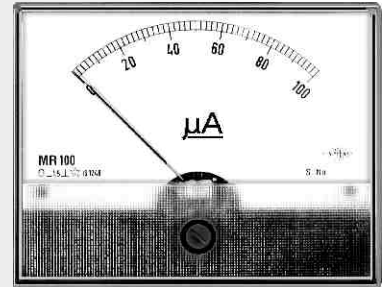

MR 100

GENERAL FEATURES

PROTECTION : IP- 52 for all cases

CONTINUOUS OVERLOAD : Ammeters 200% Rated
 Voltmeters 120% Rated

SAFETY : All Meters are "CE" Marked

OPERATING TEMPERATURE : -10°C to $+55^{\circ}\text{C}$ RH 90 %

STORAGE TEMPERATURE : -20°C to $+70^{\circ}\text{C}$ RH 90 %

POINTERS : Construction in accordance with DIN 43802

MARKING : Adheres to IEC- 51

Interchangeability in Dials help ease inventory

DIN Sized meters capable of mounting in mosaic grid


Front Cover : Glass, White ring and Black Gasket can be replaced with ease.
 The fitting is positive and unique.

Bezel : Coloured Bezels on request

Case : These are made of FR Grade Glass filled poly carbonate with
 extra thick walls giving the meter additional mechanical strength as per UL94V-0

Terminal Protection : Terminal shroud with a special design eliminates the risk of
 contact with live terminals

MOVING COIL 240° MOVEMENT

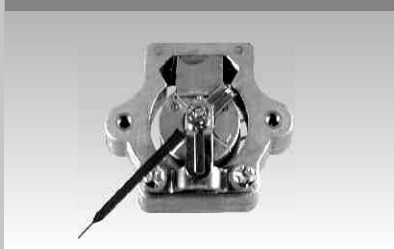

MOVING COIL 90° MOVEMENT



MOVING IRON MOVEMENT

